



## SERIES B3: 23M232 ROOTS® Meter


	<b>UNITS</b>	<b>Imperial</b>	<b>UNITS</b>	<b>Metric</b>
Temperature Range	deg. F	-40 to +140	deg. C	-40 to +60
Base Rating (Q Max.)	acfh	23000	m <sup>3</sup> /h	650
Max. Operating Pressure (MAOP)	psig	232	kPa	1600
Leak Test (125% of MAOP)	psig	290	kPa	2000
Static Test (2 x MAOP)	psig	464	kPa	3200
Rangeability +/- 1%	ratio	169:1	ratio	169:1
Rangeability +/- 2%	ratio	278:1	ratio	278:1
Start Rate	cfh	10.33	m <sup>3</sup> /h	0,2926
Stop Rate	cfh	5.75	m <sup>3</sup> /h	0,1628
Flow Rate @ 0.5" w.c., Gas	cfh	10948	m <sup>3</sup> /h	310,07
Avg. Differential, 100% Flow	in. w.c.	2.08	mbar	5,18
Max. Pressurization Rate	psig/sec	5	kPa/sec	35
Max. Operating Speed	rpm	1917	rpm	1912
Gear Ratio	ratio	500:1	ratio	176,57:1
Displaced Volume/Revolution	cf	0.2	m <sup>3</sup>	0,005662
Drive Rate, CD	cf/rev	100	m <sup>3</sup> /rev	1
Min. Odometer Reading	cf	2	m <sup>3</sup>	0,02
Odometer Turnover	yrs.	5	yrs.	5
Nominal Pipe Size	in.	4	mm	100
Flange-to-Flange	in.	9-1/2	mm	241
Flange Connection	ANSI	150#FF	ANSI	150#FF
Bolts per Flange	qty.	8	qty.	8
Bolt Size <sup>1</sup>	in.	5/8 - 11	in.	5/8 - 11
Flange Bolt Hole Depth	in.	15/16	mm	23,8
Bolt Torque: Lubricated/Non-Lub.	ft.-lb.	55/60	N-m	74/81
Restricting Orifice (120%)	in.	1-15/32	mm	30,31
Oil Capacity – Side Inlet	oz.	0.2	ml	6
Oil Capacity – Top Inlet	oz.	16.2	ml	479,1
Counter Version (CTR) <sup>2</sup>				
Net Weight	lbs.	100	kg	45,4
Shipping Weight	lbs.	103	kg	46,8
Carton Size	in.	33 x 12-1/2 x 11-1/2	cm	83 x 31 x 28
Counter with Instrument Drive (CD) <sup>2</sup>				
Net Weight	lbs.	103	kg	46,8
Shipping Weight	lbs.	106	kg	48,1
Carton Size	in.	37 x 14-1/4 x 14-1/4	cm	94 x 36 x 36

**NOTES:**


<sup>1</sup> Bolt Length varies by application.

<sup>2</sup> Weights and dimensions available for CPS upon request.

## Accuracy Curve

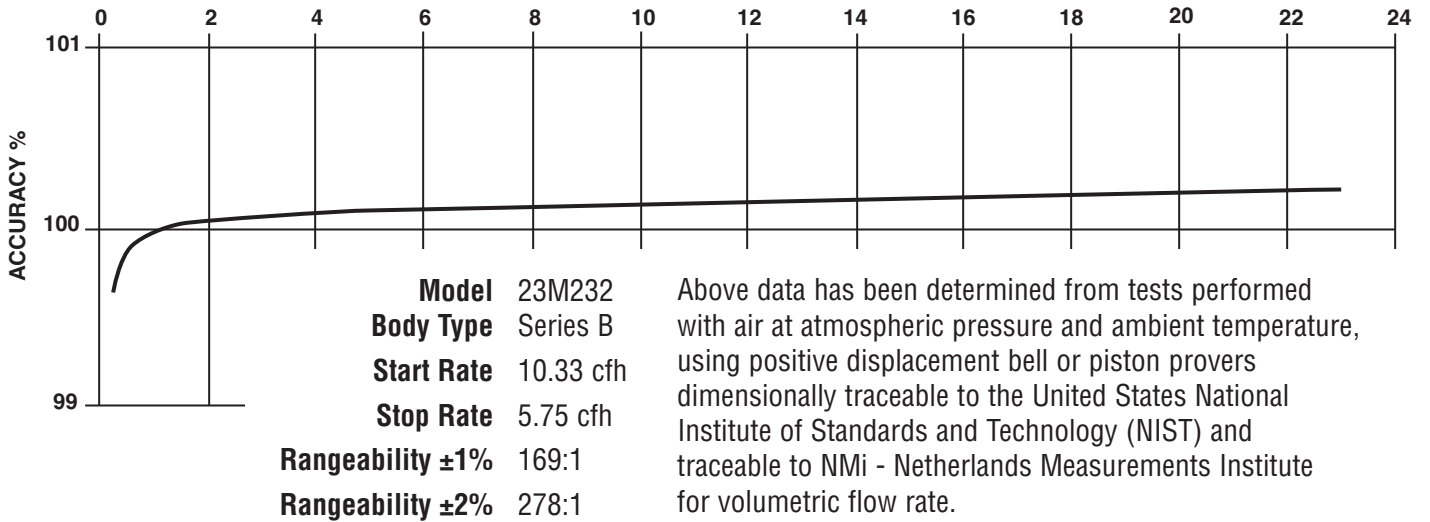

## Differential Curve

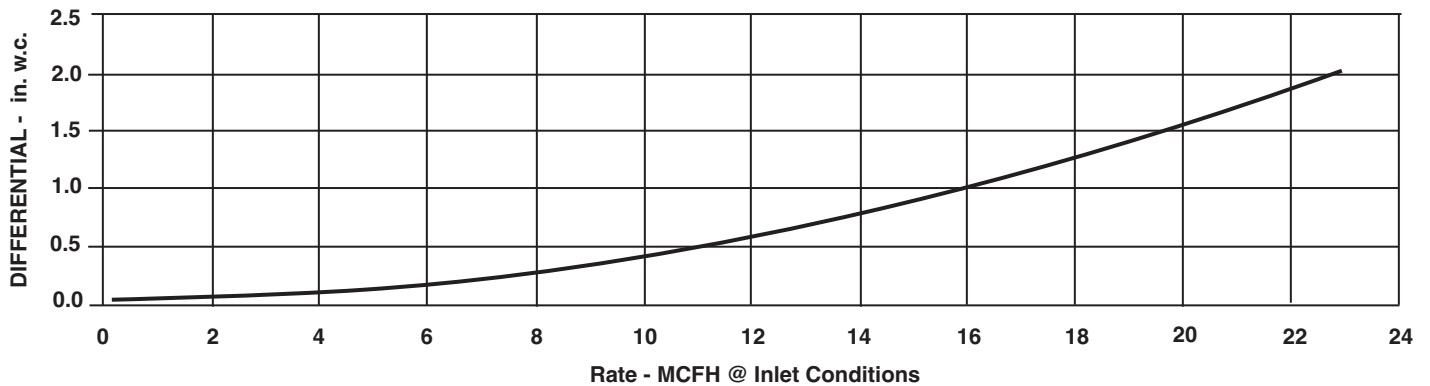

23M232 Series B3	Overall Length		Overall Height		Width (Flange/Flange)		Centerline to Accessory End (CL-AU)		Request Detailed Drawing Number
	inches	mm	inches	mm	inches	mm	inches	mm	
CTR	29	737	9-1/2	241	9-1/2	241	16-7/8	429	D057050-000
CD	32-13/16	833	9-1/2	241	9-1/2	241	20-11/16	525	D057051-000
ICPW/ITPW	30-23/32	781	9-1/2	241	9-1/2	241	18-19/32	473	D057745-000
ICEX									
IMC/W2	23-5/8	854	9-1/2	241	9-1/2	241	21-1/2	546	D057850-000

### To order

Specify: 23M232 ROOTS® Meter, Series B3 and type (CTR, CD or ICPWS).  
 For CD, specify Inlet (Top or Side) and ID Rotation (CW-B or CCW-A).  
 Contact the factory for other available information, options, or special requests.

### Roots Meters & Instruments Dresser, Inc.

16240 Port Northwest Drive  
 Houston, Texas 77041-2645 USA  
 Inside US Ph: 800.521.1114      Fax: 800.335.5224  
 Outside US Ph: 832.590.2303      Fax: 832.590.2494



[www.dresser.com](http://www.dresser.com)